

Stainless highlifter - hygiene at working height

Optimum hygiene - with a stainless highlifter the risk of bacterial contamination is minimised. The products were developed in cooperation with a Creamery for use in environments with severe hygiene demands and where the truck is exposed to an aggressive environment and thorough cleaning.

High flexibility and efficiency - one product can transport and lift a pallet to the right working height.

The design prevents industrial injuries and strain on the user - focus is put on safety and ergonomics.

High quality is ensured through an extended test programme and in cooperation with experts in Health and Safety.



Technical Specifications

The stainless highlifter is available in a stainless-plus and a stainless-semi version

- RF-PLUS: 100% stainless truck
- RF-SEMI: Galvanised truck with stainless fork chassis, handle and wheel forks

Easy to clean and optimum resistance

- acid-resistant, sandblasted and electric polished fork chassis
- strong surface
- corrosion resistant

Long operating life and low maintenance costs

- reliable cylinder construction
- strong construction
- AISI316L steel used on the fork chassis



Optimum safety through supporting feet at steering wheel and central location of all control buttons on the handle.



Closed forks mean easy cleaning and few hiding places for bacteria.




The manual highlifter is also available in an explosion proof version.

| Product (measured in mm) | HL 1000RF-PLUS HL 1000RF-SEMI | EHL 1000RF-PLUS EHL 1000RF-SEMI |
|---|----------------------------------|------------------------------------|
| Capacity in kg | 1000 | 1000 |
| Lifting height | 800 | 800 |
| Fork length | 1140 | 1140 |
| Overall height | 540 | 540 |
| Fork span | 540, 680 | 540, 680 |
| Length without forks | 340 | 440 |
| Overall length | 1480 | 1580 |
| Overall height with handle | 1195 | 1195 |
| Lowered height | 90 | 90 |
| Fork width | 163 | 163 |
| Turning angle of the wheels | 180° | 180° |
| Gangway | 1830 (pallet: 1200 x 800) | 1890 (pallet: 1200 x 800) |
| Lifting speed with/without load | | 0,05/0,08 m/s |
| Lowering speed normal/quick | 10/35 mm per pump | |
| Lowering speed | Without load 0,093 m/s | With/without load: 0,07/0,05 m/s |
| Pump motor | | 1,1 kW 12 V |
| Weight with 1140 mm forks (without battery) | 108 kg | 120 kg |



RF-PLUS - for the food industry and the pharmaceutical industry with severe demands for hygiene and cleaning.

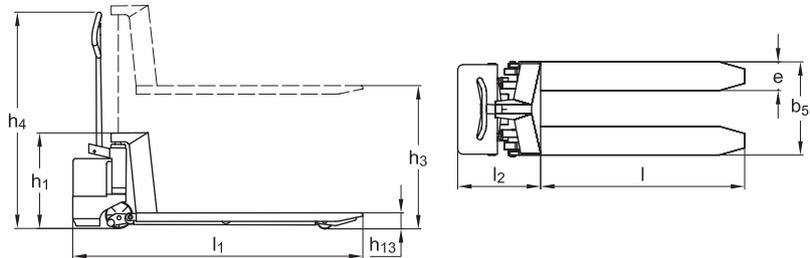

RF-SEMI - for the food industry in areas, where hygiene demands are not so high, but corrosion resistance important.



Ergonomic handle ensures the user a relaxed hold.



Remote control is available as optional extra (EHL).



Watertight casing of the lifting motor (EHL RF-PLUS).

Please ask for specification details or visit our website www.logitrans.com. We also offer tailor-made solutions.